


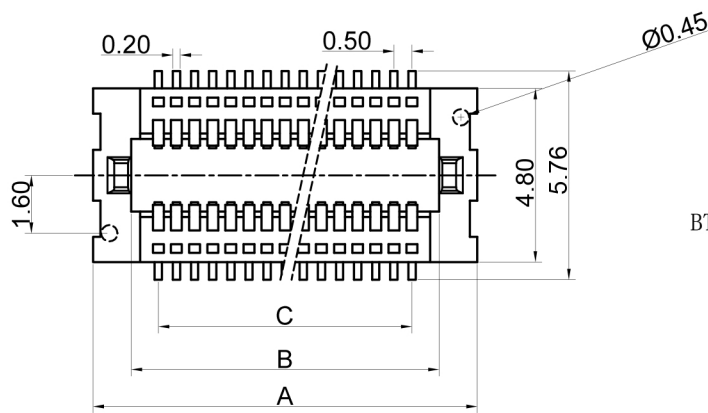

Ordering information

BTB 3 2 05- XX - 1 20 M GO W 1 5 4

1. Male
2. Female
Pitch:
1.05:0.5mm
2.08:0.8mm

No. of PIN:
(8-100P)
40=40P
15=15P





Combined High:
15:1.5mm
20:2.0mm
25:2.5mm
30:3.0mm
35:3.5mm
40:4.0mm
45:4.5mm
50:5.0mm
60:6.0mm

Welding:
S:180°
R:90°
M:SMT
W:90° SMT

Contact
Plating:
GO:gold flash
G1:3U"
G2:5U"
G3:10U"

Plastic
Material:
1:PET
2:PA46
3:PA6T
4:PA9T
5:LCP

Packing:
1:bag
2:Tube
3:Box
4:Reel

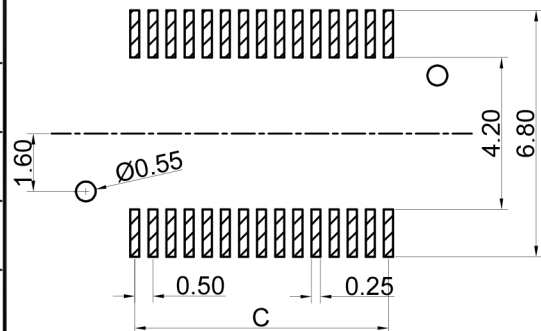

Electrical

Voltage:50 V AC(rms)/DC
Current:0.5A AC(rms)/DC
Contact Resistance:40 mΩmax(initial)
Dielectric Withstanding Voltage:200 V AC/rms
Insulation Resistance:500 MΩ min
Operating Temp:-25° C~+85° C

P 数	尺寸			P 数	尺寸		
	A	B	C		A	B	C
004	5.10	3.00	1.50	033	19.60	17.50	16.00
005	5.60	3.50	2.00	034	20.10	18.00	16.50
006	6.10	4.00	2.50	035	20.60	18.50	17.00
007	6.60	4.50	3.00	036	21.10	19.00	17.50
008	7.10	5.00	3.50	037	21.60	19.50	18.00
009	7.60	5.50	4.00	038	22.10	20.00	18.50
010	8.10	6.00	4.50	039	22.60	20.50	19.00
011	8.60	6.50	5.00	040	23.10	21.00	19.50
012	9.10	7.00	5.50	041	23.60	21.50	20.00
013	9.60	7.50	6.00	042	24.10	22.00	20.50
014	10.10	8.00	6.50	043	24.60	22.50	21.00
015	10.60	8.50	7.00	044	25.10	23.00	21.50
016	11.10	9.00	7.50	045	25.60	23.50	22.00
017	11.60	9.50	8.00	046	26.10	24.00	22.50
018	12.10	10.00	8.50	047	26.60	24.50	23.00
019	12.60	10.50	9.00	048	27.10	25.00	23.50
020	13.10	11.00	9.50	049	27.60	25.50	24.00
021	13.60	11.50	10.00	050	28.10	26.00	24.50
022	14.10	12.00	10.50	051	28.60	26.50	25.00
023	14.60	12.50	11.00	052	29.10	27.00	25.50
024	15.10	13.00	11.50	053	29.60	27.50	26.00
025	15.60	13.50	12.00	054	30.10	28.00	26.50
026	16.10	14.00	12.50	055	30.60	28.50	27.00
027	16.60	14.50	13.00				
028	17.10	15.00	13.50				
029	17.60	15.50	14.00				
030	18.10	16.00	14.50				
031	18.60	16.50	15.00				
032	19.10	17.00	15.50				

PCB 寸法

TOLERANCE:		上海狮拓电子科技有限公司	姓名	客户确认	0.5mm合高1.5mm母座
X. ±XXX			日期	☐ 承认 日期 ☐ 驳回 日期	
.X ±0.20			审核		
.XX ±0.10			日期		
ANG.					
产品名称:		THIRD ANGLE PROJECTION			
产品料号:					