
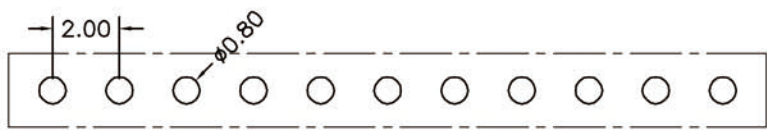
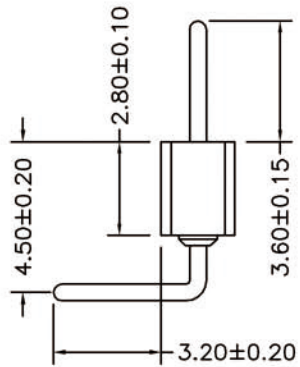
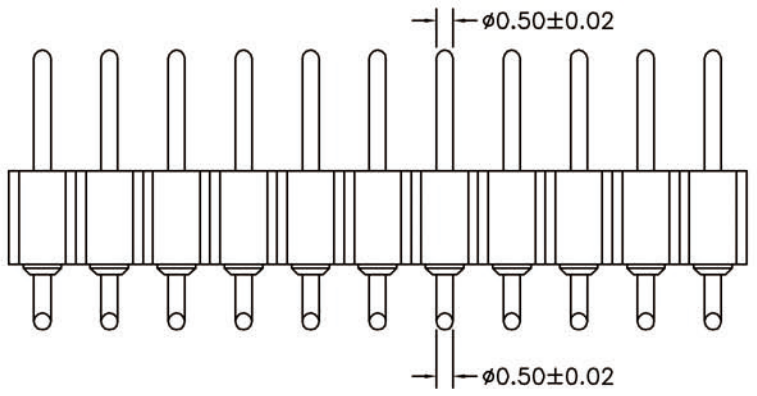


A B C D E

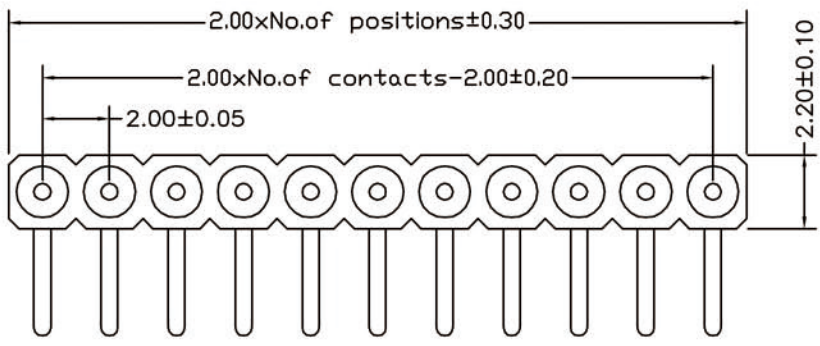

P. C. B LAYOUT

Technical Data

Material:

Pin(outer sleeve):Brass,machined CuZn38Pb2

Plating(outer sleeve):

Tin Plated:2µm/80µm"NI, 5µm/200µ"Sn

Gold Plated:2µm"/80µm"Ni, 0.8µ" gold

Plating(Contact ):2µm/80µ"NI,gold or Tin plated

Insulator:PPS UL94V-0

Electrical:

Current rating:3Amps/contact max.

Contact resistance:≤4mΩ/contact

Insulation resistance:≥1000MΩ at V=100V

Dlelectric Withstanding Voltage:1000V AV Min

Operaling voltage:60VAC/DC

Mechanical:

Mechanical lige:min 500 cycle

Operaling temperature:-40° C to+105° C

Soldering temperature:+255° C

TOLERANCE:
.X ±XXX
.X ±0.20
.XX ±0.10
ANG.



上海狮拓电子科技有限公司

產品名稱:  
產品料號:

THIRD ANGLE PROJECTION

簽名 \_\_\_\_\_  
日期 \_\_\_\_\_  
審核 \_\_\_\_\_  
日期 \_\_\_\_\_

客戶確認  
 承認 \_\_\_\_\_ 日期 \_\_\_\_\_  
 駁回 \_\_\_\_\_ 日期 \_\_\_\_\_

STOC1-RXXXX1210A