
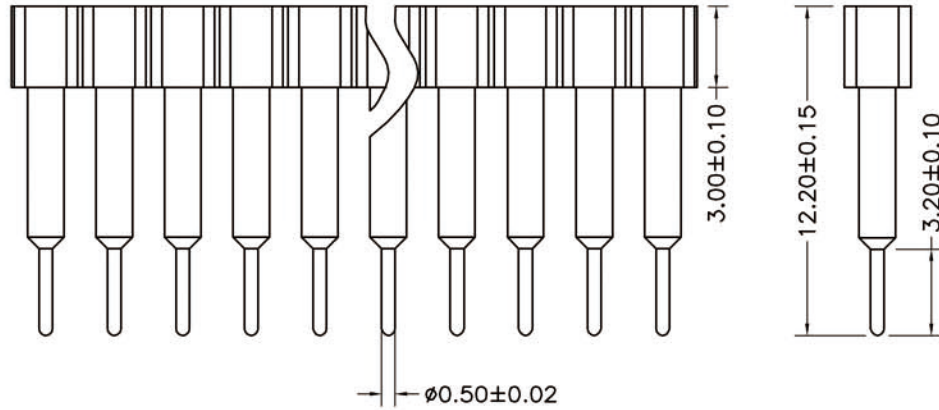


A B C D E

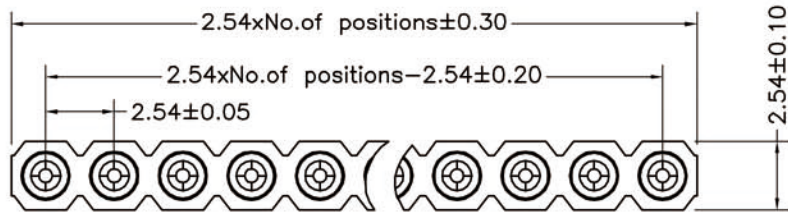

P. C. B LAYOUT

Technical Data

Material:  
 Pin(outer sleeve):Brass,machined CuZn38Pb2  
 Plating(outer sleeve):  
 Tin Plated:2µm/80µm"NI, 5µm/200µ"Sn  
 Gold Plated:2µm"/80µm"Ni, 0.8µ" gold  
 Plating(Contact ):2µm/80µ"NI, gold or Tin plated  
 Insulator:PPS UL94V-0  
 ClIp(Contact 4 Flnger):Beryllium copper,heat teated

Electrical:

Current rating:3Amps/contact max.  
 Contact resistance:≤4mΩ/contact  
 Insuiation resistance:≥1000MΩ at V=100V  
 Operaing voitage:60VAC/DC

Mechanical:

Average Insertion force with steel pin of Ø0.432:<250g  
 Average withdrawal force with steel pin of Ø0.432:>70g  
 Mechanical lige cycle:min 200  
 Operaling temperature:-40° C to+105° C  
 Soldering temperature:+255° C

TOLERANCE:
X. ±XXX
.X ±0.20
.XX ±0.10
ANG.

	<h1>上海狮拓电子科技有限公司</h1>	
	產品名稱:	產品料號:
THIRD ANGLE PROJECTION		

簽名 _____	客戶確認
日期 _____	
審核 _____	<input type="checkbox"/> 承認 _____ 日期 _____
日期 _____	<input type="checkbox"/> 駁回 _____ 日期 _____

STOD1-DXXXXXX1220B-1